

CHAINS

ESTABLISHED CORNERS FOR OREGON STATE BOARD OF FORESTRY
(See official plat)

West one-sixteen th corner common to Sections 19 and 30
T3S, R9W, W.M., Tillamook County, Oregon.

ESTABLISHED Var. $21\frac{1}{2}^{\circ}E$

Set $1\frac{1}{2}$ " x 36" galvanized iron pipe with 3" bronze cap
marked "OREGON STATE BOARD OF FORESTRY W 1/16 S19 S30
1957 RS 359," 35 inches in ground, in mound of stone,
and from which a:

53" Maple bears N58°W 104.9 ft.; scribed W 1/16 S19
BT RS 359

29" Spruce bears S38°W 102.8 ft.; scribed W 1/16 S30 BT.

Oregon State Board of Forestry metal location poster on
53" Maple BT.

Set 4"x4"x60" white painted Cedar post 1.5 feet SE of pipe.

Southwest one-sixteenth corner in Section 30, T3S, R9W
W.M., Tillamook County, Oregon.

ESTABLISHED Var. $21\frac{1}{2}^{\circ}E$

Set $1\frac{1}{2}$ " x 36" galvanized iron pipe with 3" bronze cap
marked "OREGON STATE BOARD OF FORESTRY SW 1/16 S30
1957 RS 359," 33 inches in ground, and from which a:

20" Fir bears N27°E 22.9 ft.; scribed SW 1/16 S30
BT RS 359


19" Double fir bears N68 $\frac{1}{2}$ °W 35.9 ft.; scribed SW 1/16
S30 BT.

Oregon State Board of Forestry metal location poster on
19" double fir BT.

Set 4"x4"x60" white painted Cedar post 1.5 feet NW of pipe.
Corner is 3.8 feet N of E-W fence line.

Dated February 21, 1957.

Established by Richard Morris under my direction
Richard Morris, Transitman

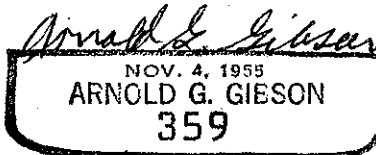

Present and witnessed by Lloyd Geraths and Robert Sturm