

CHAINS

RESTORED CORNER FOR OREGON STATE BOARD OF FORESTRY

Section corner common to sections 29, 30, 31, and 32, T2S R6W, WM., Tillamook and Yamhill Counties, Oregon.

ORIGINAL

Post, now missing, from which a:

- 50" Fir bears N22E 74 lks; now 67" stump bears N27E, scribe marks BT T2S exposed.
- 8" V. Maple bears S70E 56 lks, now missing.
- 30" Hemlock bears S10W 56 lks, now missing.
- 12" Hemlock bears N60W 19 lks, now 24" stub 12' high bears N72W, parts of scribe marks S and W exposed on edge of face.

RESTORED CORNER AND BEARING TREES


Set $1\frac{1}{2}$ " x 36" galvanized iron pipe with 3" bronze cap marked "OREGON STATE BOARD OF FORESTRY T2S R6W S30 S29 S31 S32 1952 2311," $2\frac{1}{2}$ " in ground. Raised mound of stone around corner pipe, from which a:

- 48" Fir stump bears S55°30'W 157.6'; scribed T2S R6W S31 BT RE 2311.
- 57" Fir stump bears N65W 32.6'; scribed T2S R6W S30 BT.
- 66" Fir stump bears N23E 81.1'; scribed T2S R6W S29 BT.
- 60" Fir stump bears S14°30'E 93.4'; scribed T2S R6W S32 BT.

Placed an Oregon State Board of Forestry metal location poster on 66" Fir stump BT and marked it: Sec 29 T2S R6W Sec Cor 81.1 Ft. S23W.

Dated August 15, 1952.

This corner was restored by Don D. Davis, under my direction. Don D. Davis Assistant Forest Engineer

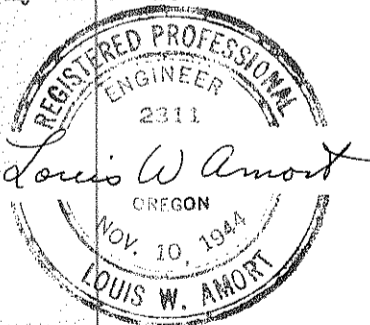

Present and witnessed by Richard A. Morris Richard A. Morris Compassman

Present and witnessed by Robert A. Young Robert A. Young Chairman