

LINCOLN COUNTY CORNER REPORT
SOUTHWEST CORNER OF SECTION 18, (06-09)
GCDB 0609100400
SHEET 1 OF 2

1880 S.G. CAUDLE GLO CONTRACT 364

SET: POST FOR CORNER TO SECTIONS 18 AND 19 ON RANGE LINE BETWEEN TOWNSHIPS 6 SOUTH, RANGES 9 AND 10 WEST, FROM WHICH:

- 8" HEMLOCK BEARS N 40° E, 7 LINKS (4.6').
- 4" HEMLOCK BEAR S 51° E, 5 LINKS (3.3').
- 5" HEMLOCK BEARS S 50° W, 34 LINKS (22.4').
- 6" HEMLOCK BEARS N 30° W, 21 LINKS (13.9').

1887 JEFFERSON D. FENTON SILETZ INDIAN RESERVATION AND GLO CONTRACT 531

FOUND: POST, 4" SQUARE, FIRMLY SET IN THE GROUND, MARKED "T6S S18" ON NORTHEAST, "R9W S19" ON SOUTHEAST, "R10W S24" ON SOUTHWEST, AND "S13" ON NORTHWEST FACES, WITH THREE NOTCHES ON THE NORTH AND SOUTH EDGES, FROM WHICH:

- 8" HEMLOCK MARKED "T6S R9W S18 BT" BEARS N 40° E, 7 LINKS (4.6') (= GLO).
- 4" HEMLOCK "T6S R9W S19 BT" BEAR S 51° E, 5 LINKS (3.3') (= GLO).
- 5" HEMLOCK "T6S R9W S24 BT" BEARS S 50° W, 34 LINKS (22.4') (= GLO).
- 6" HEMLOCK "T6S R10W S13 BT" BEARS N 30° W, 21 LINKS (13.9') (= GLO).

1890 ALBERT P. WILSON GLO CONTRACT 555

FOUND: POST, 4" SQUARE, FIRMLY SET IN THE GROUND, MARKED "T6S R10W S13" ON NORTHWEST, "T6S R9W S18" ON NORTHEAST, "S19" ON SOUTHEAST, "S24" ON SOUTHWEST, FACES, FROM WHICH POST:

- 8" HEMLOCK MARKED "T6S R9W S18 BT" BEARS N 40° E, 7 LINKS (4.6') (= GLO).
- 4" HEMLOCK "S19 BT" BEAR S 50° E, 5 LINKS (3.3') (GLO S 51° E) (= GLO).
- 5" HEMLOCK "S24 BT" BEARS S 50° W, 34 LINKS (13.2') (= GLO).
- 6" HEMLOCK "T6S R10W S13 BT" BEARS N 30° W, 20 LINKS (13.2') (GLO 21 LINKS).

1904 MORRIS WYGANT GLO CONTRACT 758

FOUND: POST, FIRMLY SET, MARKED AND WITNESSED AS DESCRIBED BY THE SURVEYOR GENERAL.

NEW: WYGANT DESTROYED ALL THE MARKS ON POST AND BEARING TREES RELATING TO SECTION 24, T6S, R10W, AND SECTION 19, T6S R9W.

- HEMLOCK POST, 3' LONG, 4" SQUARE, 24" IN THE GROUND, FOR CLOSING CORNER OF SECTIONS 24 (T6S R10W) AND 19 (T6S R9W), MARKED "CC ON SOUTH, "T6S R9W S19" ON EAST, AND "T6S R10W S24" ON WEST FACES, WITH 3 GROOVES ON SOUTH AND NORTH FACES, BEARS N 89°56' E, 154 LINKS (101.6').
- NOTE: WYGANT RETRACED THE SOUTH BOUNDARY OF SECTION 13 (T6S R10W), AND RETURNED A BEARING OF S 89°42' W ALONG THE SECTION LINE. THIS CREATED A GLO ANGLE POINT AT THE CORNER OF SECTIONS 18 AND 13.

1984 JAMES W. PROCHNAU CS 10649

FOUND: NO EVIDENCE OF CORNER.

SET: 2 X 30" GALVANIZED IRON PIPE WITH 2-1/2" BRASS CAP BY MODIFIED SINGLE PROPORTION BETWEEN ORIGINAL S.I.R. 46 1/2 MILE CORNER AND ORIGINAL S.I.R. 47 MILE CORNER. THE MODIFIED PROPORTION USED AN ANGLE POINT AT THIS CORNER CREATED BY WYGANT IN 1904. MEASURED N 88°21'43" W, 1104.82' PLUS N 88°36'01" W, 1438.88', TOTAL = N 88°29'48" W, 2543.69'. GLO RECORD IS WEST, 17.43 CHAINS (1150.4') PLUS S 89°42' W, 22.26 CHAINS (1469.16'), TOTAL = S 89°50' W, 2619.5'. FROM PIPE:

NEW:

- 15" SPRUCE MARKED "T6S R9W S18 BT" BEARS N 56° E, 32.8'.
- 8" SPRUCE MARKED "T6S R10W S13 BT" BEARS N 44° W, 21.7'.
- 2" X 30" GALVANIZED IRON PIPE WITH 2-1/2" BRASS CAP FOR CLOSING CORNER OF SECTIONS 19 (6-9) AND 24 (6-10) BEARS S 88°21'43" E, 99.56' (GLO S 89°56' W, 1.54 CHAINS = 101.6').

1987 NORMAN D. SPRINGER CS 11767

FOUND: 2" IRON PIPE (CS 10649) WITH 2-1/2" BRASS CAP MARKED "T6S R10W R9W S13/S18/ 1984 PLS 1305", FROM WHICH:

- 15" SPRUCE WITH SCRIBING VISIBLE BEARS N 56° E, 32.8' (= CS 10649).
- 8" SPRUCE WITH SCRIBING VISIBLE BEARS N 47° W, 21.7' (CS 10649 N 44° W, 21.7').

2008 LINCOLN COUNTY SURVEYOR'S OFFICE

FOUND: 2-1/2" OUTSIDE DIAMETER GALVANIZED IRON PIPE 0.9' ABOVE GRADE, WITH 2-1/2" BRASS CAP MARKED "T6S R10W R9W S13/S18 1984 PLS 1305", FROM WHICH:

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Tom Hamilton

OREGON
JULY 13, 1979
THOMAS R. HAMILTON
PLS #1818

RENEWAL DATE: JUNE 30, 2009

LINCOLN COUNTY CORNER REPORT
SOUTHWEST CORNER OF SECTION 18, (06-09)
GCDB 0609100400
SHEET 2 OF 2

- 23" SPRUCE WITH HEALED DOUBLE BLAZE AND ILLEGIBLE ALUMINUM LOCATOR TAG BEARS N 56° E, 32.8' (= CS 10649).
- 10" SPRUCE, STUNTED BY SHADE FROM SURROUNDING TREES, WITH HEALED DOUBLE BLAZE AND BEARING TREE TAG MARKED "S 44 E, 21.7'", AND "ATTENTION" SIGN ON BACK, BEARS N 44° W, 21.7' (= CS 10649).
- CARSONITE POST, FACING SOUTH, BEARS WEST, 2.5'.
- 2-1/2" OUTSIDE DIAMETER GALVANIZED IRON PIPE WITH 2-1/2" BRASS CAP MARKED "T6S R9W S18/S24/S19 CC 1984 PLS 1305" BEARS S 88°19'30" E, 99.56' (CS 10469 S 88°21'43" E, 99.56').

NEW:



- 5/8 X 30" IRON ROD WITH 2" LINCOLN COUNTY ALUMINUM CAP MARKED "63AZ 2008" BEARS S 37°36'23" E, 306.85'.
- 5/8" X 30" IRON ROD WITH YELLOW PLASTIC CAP MARKED "LINCOLN CO. SURVEY" BEARS N 34°58'37" W, 89.00'.
- CARSONITE POST ON EAST SHOULDER OF GRAVEL ROAD BEARS N 88°31'W, 266'.

CONCLUSION: THE PIPE FOUND IS THAT SET BY PROCHNAU IN 1984.

MEASUREMENTS WERE DONE WITH A LEICA TCA1105 TOTAL STATION, POCKET COMPASS AND STEEL TAPE. BEARINGS ARE GEODETIC, BASED UPON STARNET PROJECT 6-9.PRJ AND THE MAPPING ANGLE OF -2°22'19" AT THE SECTION CORNER.

WITNESSES: PHIL LAMBERSON

LINCOLN COUNTY SURVEYOR'S OFFICE
880 NE 7TH ST.
NEWPORT, OREGON 97365
(541)-265-4147

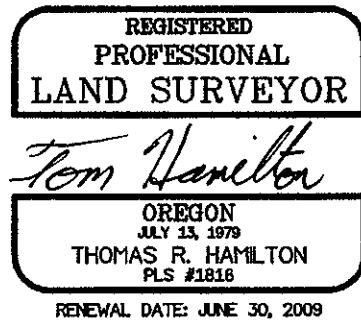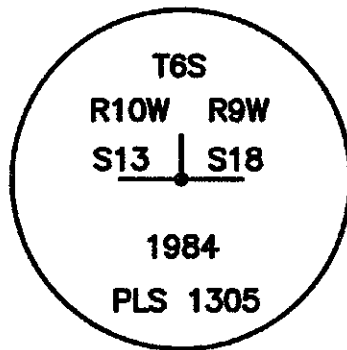

BOOK 7 5026