



CORNER INVESTIGATION REPORT

FS INDEX ID: V-25

CORNER: SECTION GCDB ID: 700200 & 100200 **DATE:** 6/11/2018
TOWNSHIP: 3S **STATE:** OREGON
RANGE: 8W & 7W **COUNTY:** TILLAMOOK
SECTION: 25 & 36, 30 & 31 **FOREST:** SIUSLAW
MERIDIAN: WILLAMETTE **DISTRICT:** HEBO

NFSL PROPERTY BOUNDARY CORNER?: YES NO
LINE(S) POSTED: NORTH - 1985 SOUTH - 1985 EAST - 1985 WEST - 1985
MAINTAINED: NORTH - NONE SOUTH - 2017 EAST - 2017 WEST - NONE
GUARD POST(S): NORTH - 3 FT SOUTH - 3 FT EAST - 3 FT WEST - 3 FT

CORNER HISTORY:

- (1) ESTABLISHED CORNER, SET 14"x12"x6" BASALT STONE & 4 BT'S.
- (2) FOUND STONE & 4 BT'S.
- (3) NO RECORD, LIKELY FOUND STONE AND 3 BT'S, MARKED 4 NEW BT'S
- (4) FOUND STONE & 7 BT'S, SETS IRON PIPE/BRASS CAP & 1 NEW BT.
- (5) FOUND "BRASS CAP (B.P.L.S.)", NO MENTION OF BT'S PRESENT
- (6) FOUND IRON PIPE/BRASS CAP & 6 BT'S.
- (7) FOUND IRON PIPE/BRASS CAP & 6 BT'S, SET ALUM. PIPE/CAP RM & 1 NEW BT.
- (8) MAP NOTES FOUND MONUMENT, NOT TIED.

MONUMENT FOUND/SET:

FOUND A 2-1/2" GALVANIZED IRON PIPE WITH A 3-1/4" BRASS CAP, PROJECTING 7 INCHES ABOVE THE GROUND.

RECORD CORNER ACCESSORIES:

- A MOUND OF ROTTED REMAINS OF A FIR WITH NO MARKS VISIBLE.
- AN INDETERMINATE SIZE ROTTED FIR STUMP WITH NO MARKS VISIBLE.
- NO TRACE FOUND OF A (1)20" FIR, (2)FIR STUB
- NO TRACE FOUND OF A (1)16" FIR, (2)STUB, (4)30" ROTTED STUMP
- NO TRACE FOUND OF A (3)20" ALDER
- A 46" FIR STUMP WITH NO MARKS VISIBLE
- A 44" FIR WITH A HEALED DOUBLE BLAZE.
- A 21" FIR WITH A HEALED DOUBLE BLAZE, TREE IS IN NW QUAD PER (6) & (7).
- A 25" SAWN FIR STUMP WITH A HEALED DOUBLE BLAZE.
- A 38" ALDER WITH NO MARKS VISIBLE.
- A 2-1/2" ALUMINUM PIPE WITH A 3-1/4" ALUMINUM CAP FOR REFERENCE MONUMENT, PROJECTING 4" ABOVE GROUND. MARKED AS DESCRIBED IN (7).

NEW CORNER ACCESSORIES:

NO NEW ACCESSORIES ESTABLISHED.

CORNER MAINTENANCE/OTHER INFO:

CLEAR BRUSH FROM AROUND MONUMENT & TO BT'S, BT FACES & A 6" BAND AT HEAD HEIGHT PAINTED RED. ADD NEW NAILS TO BT TAGS & ADD NEW TAGS WHERE NEEDED. MONUMENT SIZES ARE OUTSIDE DIAMETER & BT DIAMETERS ARE AT BREAST HEIGHT.
 NFSL LINES BEAR: (7)N88°20'47"W - 1277.25 FT, (7)S0°15'26"E - 2560.06 FT,
 (7)N88°39'54"E - 2640.31 FT & (7)N0°00'55"E - 2628.76 FT

GEODETTIC COORDINATES:

LATITUDE: N 45° 16' 20.637"
LONGITUDE: W 123° 35' 47.432"
ELLIPSOID HEIGHT: ~1150 FT
DATUM: WGS 84

DOCUMENTS ON FILE AT:

WILLAMETTE NATIONAL FOREST
 3106 PIERCE PARKWAY, STE D
 SPRINGFIELD, OREGON 97477

SOURCE: CONSUMER GRADE GPS, FOR NAVIGATION TO CORNER.

DATE OF INVESTIGATION: 11/29/2017

REPORT BY: JONATHAN B. DREW II, PLS #89396, CFedS #1664

FIELD CREW: ANDREW HILLMAN, USFS SURVEY TECH
 JACOB HUNT, USFS SURVEY TECH

HISTORY OF VISITATIONS:

- (1)1884 - H. MELDRUM, GLO SURVEY
- (2)1894 - F. SHARP, GLO SURVEY
- (3)???? - UNKNOWN SURVEYOR & YEAR
- (4)1962 - L.M. ROSEBERRY, BLM RESURVEY, RW1/497 & 500
- (5)1965 & 1967 - B. UDELL, CSF# A-1237 & A-1405
- (6)1984 - S. HARDIN, BLM RESURVEY, RW6/268 & F40-354
- (7)1985 - L. BISHOP, CSF# B-1191, B-1194 & B-1196
- (8)2012 - T. JONES, CSF# B-3531

REGISTERED PROFESSIONAL LAND SURVEYOR

Jonathan B. Drew II

OREGON
 DECEMBER 3, 2014
 JONATHAN B. DREW II
 89396

EXPIRES: 12/31/2019


RECORD MEASUREMENTS:

- (1,2,4,6)N64°W - 44.88 FT, (7)44.9 FT
- (1,2,4,7)N33°E - 29.7 FT, (6)32.01 FT
- (1,2)S42°E - 38.94 FT
- (1,2,4)S43°W - 46.2 FT
- (4)S58°E - 38.94 FT
- (4,6)S54°E - 48.84 FT, (7)48.8 FT
- (4,7)S42°W - 69.3 FT, (6)S41°W
- (4)N72°E - 34.98 FT, (6)N72°W, (7)35.0 FT
- (4)N62°E - 67.98 FT, (6)N61°E - 66.99 FT, (7)N63°E - 68.0 FT
- (7)SOUTH - 14.9 FT
- (7)N63°28'E - 53.2 FT

METHOD OF MEASUREMENT:

NO NEW MEASUREMENTS TAKEN, FILED AS CONDITION REPORT.

CAP DIAGRAM:

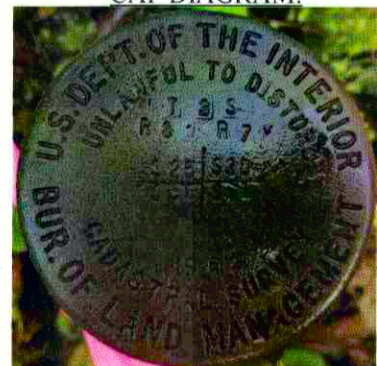

THIS DOCUMENT FILED IN CS OFFICE: YES

OTHER DOCUMENT FILED WITH CS: RECORD OF SURVEY FILED SEPARATELY