

CHAINS

RESTORED CORNER FOR OREGON STATE BOARD OF FORESTRY

Section corner common to Sections 7, 8, 17 and 18,
Township 1 South, Range 6 West, W.M., Tillamook
and Washington Counties, Oregon.

ORIGINAL

Post, now missing, from which a:

- 24" Fir, bears N20°E 39 lks.; now 30" stub
40 ft. high, scribes T1S R6W visible.
- 48" Fir bears S59°W 22 lks.; now 48" snag,
BT scribes visible, rest unexposed.
- 24" Fir bears N42°W 21 lks.; now 24" stub 30 ft.
high, scribe S visible, rest burnt out.
- 36" Fir bears S36°E 54 lks.; now 45" stump,
BT scribes visible.

RESTORED

Set 1½" x 36" galvanized iron pipe with 3" bronze cap
marked "OREGON STATE BOARD OF FORESTRY T1S R6W S7 S8
S17 S18 1954 RE 2311," 33 inches in ground, in mound
of stone 3' x 3" x 8", and from which a:

- 30" Fir snag bears N84°E 28.0 ft.; scribed T1S
R6W S8 BT.
- 36" Fir snag bears N62°E 10.9 ft.; scribed T1S
R6W S17 BT RE 2311.
- 60" Fir snag bears S39°W 58.2 ft.; scribed T1S
R6W S18 BT.
- 50" Fir snag bears N72°W 39.0 ft.; scribed T1S
R6W S7 BT.


Oregon State Board of Forestry metal location poster on
36" Fir snag BT S62°E.

Also poster on original 24" Fir BT.

4" x 4" x 72" white Cedar post 1.5 ft. SW of pipe.

Dated March 19, 1954.

Restored by Richard Morris under my direction.
Richard Morris, Compassman

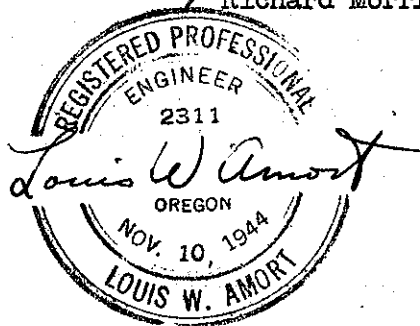

Present and witnessed by Alan Ramage