

CHAINS

RESTORED CORNER FOR OREGON STATE BOARD OF FORESTRY

Section corner common to Sections 25, 30, 36 and 31, T. 3S, Rgs. 9 and 10W, W.M., Tillamook County, Oregon.

ORIGINAL

RESURVEY 1887 (County Surveyor Office)

(Found 3/4" x 48" iron pipe) from which a:

- 34" dead fir bears N41°W 206 lks. now 48" snag, no scribes remaining.
- 30" dead fir bears S52°W 74 lks. now 40" snag, scribes T3S Remaining.
- 32" dead fir bears N77°E 118 lks. now 50" snag, scribes T3S R9W S30 BT remaining.
- 28" dead fir bears S86°E 67 lks. now 28" x 8 ft. stub, no scribes remaining.

RESTORED

Var. 21½°


Set 4"x4"x60" white painted Cedar post 1 ft. SW of above pipe from which a:

- 26" Fir bears N15°E 5.2 ft.; scribed T3S R9W S30 BT RS 359.
- 10" Fir bears N21°W 22.9 ft.; scribed T3S R10W S25 BT.
- 18" Fir bears S34°W 102.2 ft.; scribed T3S R10W S36 BT.
- 24" Fir (double top) bears S68°E 20.5 ft.; scribed T3S R9W S31 BT.

Oregon State Board of Forestry metal location poster on 26" Fir BT.

Dated February 5, 1957

Restored by Richard A. Morris under my direction.
Richard A. Morris, Transitman

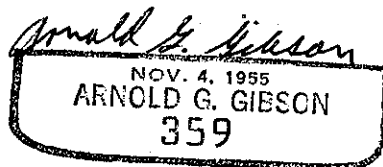

Present and witnessed by Robert Sturm
Lloyd Geraths